

INTRODUCING TRENCHMATE'S


New high strength trench shield range

Trenchmate have spent the last 18 months developing and testing a newly designed high strength trench shield increasing shield ground loading capacities up to **three times stronger** than their current range.

- ✔ Certified to AS 4744.1-2000
- ✔ Same internally strut to strut length as current trench shield range
- ✔ Up to three times the strength of our current trench shield range
- ✔ Suited to jobs where high ground loading is being experienced
- ✔ Compatible with all Trenchmate's existing trench shield product i.e. stackable/interlocking
- ✔ Bolt on front end cutting edge in development
- ✔ Sustainably manufactured from 100% recyclable materials
- ✔ 100% designed and manufactured in New Zealand using locally supplied materials.
- ✔ 3.6m & 4.9m long shields currently in development

SPECS OF TRENCHMATE HIGH STRENGTH SHIELDS:

Specs	Length	Height	Panel Width	Shield Width	Strut Clearance End to End	Clearance Under Bottom Strut	SWL (Yellow Strut)	SWL (Red Strut)
TSAP490	4900mm	2400mm	200mm	610mm - 6000mm	4480mm	1050mm	80kPa	80kPa
TSAP650	6500mm	2400mm	200mm	610mm - 6000mm	6180mm	1050mm	50kPa	65kPa

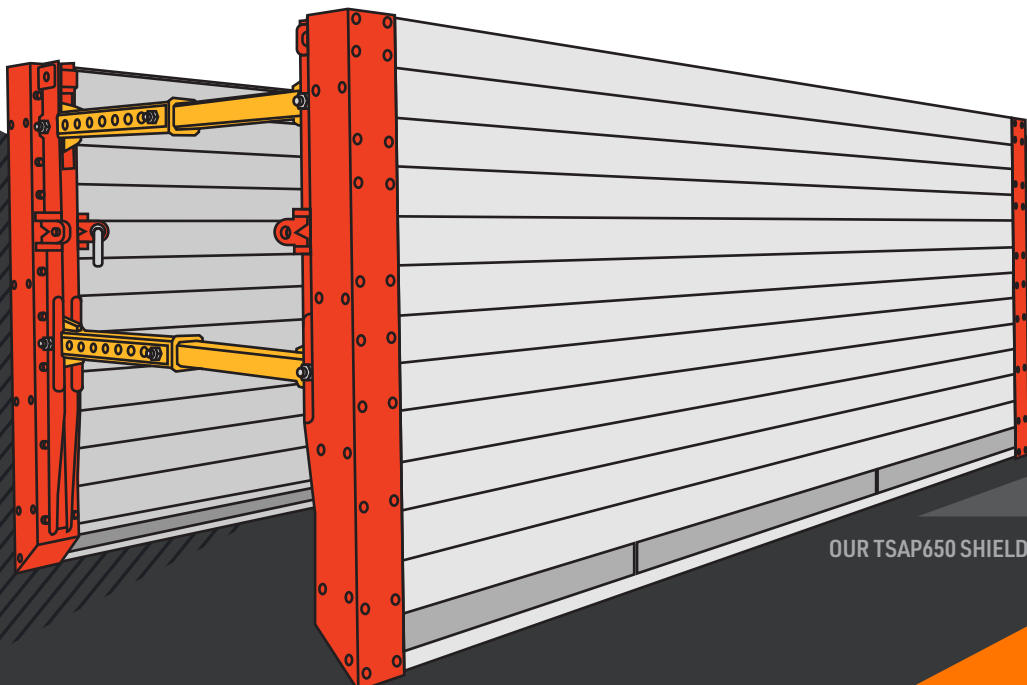

For more information, please call your Trenchmate representative or give us a bell on:

 trenchmate.co.nz

 0800 385 274



trenchmate
certified shoring solutions